

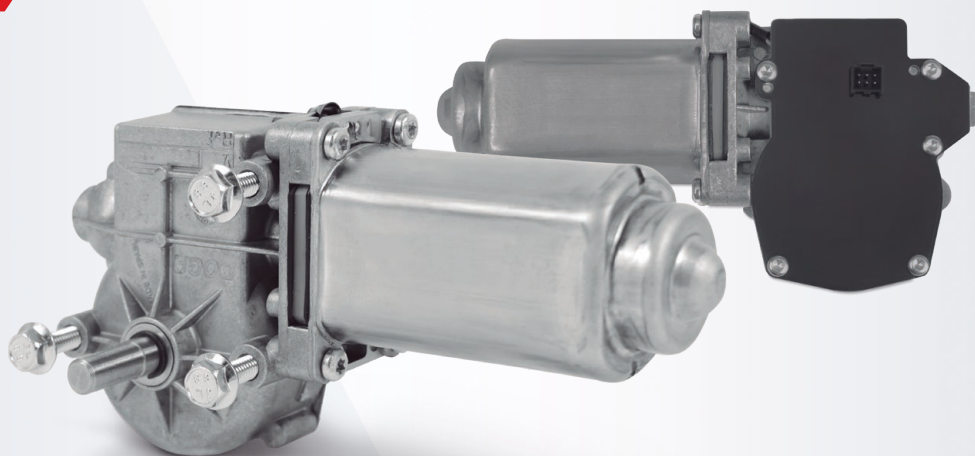


317 hall

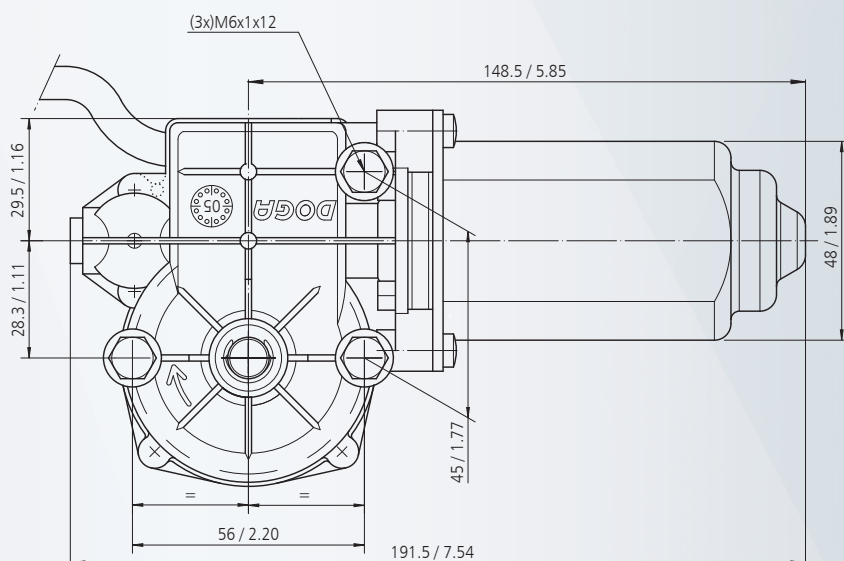


MOTOR FEATURES

REFERENCE NUMBER REFERENCIA REFERENZNUMMERN	NOMINAL VOLTAGE TENSION NOMINALE NENNSPANNUNG	NOMINAL TORQUE PAR NOMINAL COUPLE NOMINAL DREHMOMENT NOMINAL	NOMINAL SPEED VELOCIDAD NOMINAL VITESSE NOMINALE GESCHWINDIGKEIT NOMINAL	NOMINAL CURRENT CORRIENTE NOMINAL COURANT NOMINAL NOMINALSTROM	STARTING TORQUE PAR DE ARRANQUE COUPLE DE DEMARRAGE ANZUGSDREHMOMENT	STARTING CURRENT CORRIENTE DE ARRANQUE COURANT DE DEMARRAGE ANLAUFSTROM	SHAFT EJE ARBRE WELLE	CONNECTIONS CONEXIONES CONNEXIONS ANSCHLUSSART	WIRING DIAGRAM ESQUEMA ELECTRICO SCHEMA ELECTRIQUE SCHALTBIID.	TRANSMISSION RATIO RELACION DE REDUCCION RAPPORT DE REDUCTEUR UNTERSETZUNG	APPROXIMATE WEIGHT PESO APROXIMADO POIDS APPROXIMATIF GEWICHT (ca.)	WATERTIGHTNESS GRADO DE ESTANQUEIDAD ETANCHÉITÉ FEUCHTIGKEITSSCHUTZKASSE	WHEEL MATERIAL MATERIAL RUEDA MATERIAL ROUE MAT. DES SCHNECKENRADES	CURVE CURVA COURBE KURVE	PULSES NUM. N.º PULSOS NUM. PULSES IMPULSANZAHL
	Un (V)	Mn (N.m./lbf.in)	nn (r.p.m.)	In (A)	Ma (N.m./lbf.in)	Ia (A)				i	P (kg/lb)	IP			
31797062000	12	4 / 35	25	2.5	12 / 106	8	E30	C30/C44	EE4	62:1	1.15/2.54	IP10	PLA	64	310
31797063000	24	4 / 35	25	1.1	12 / 106	4	E30	C30/C44	EE4	62:1	1.15/2.54	IP10	PLA	64	310

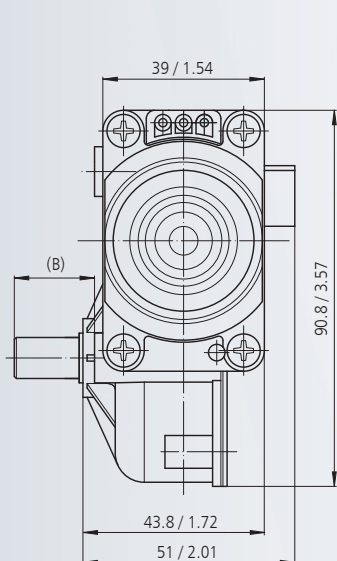


mm / inch

CONNECTIONS CONEXIONES CONNEXIONS ANSCHLUSSART

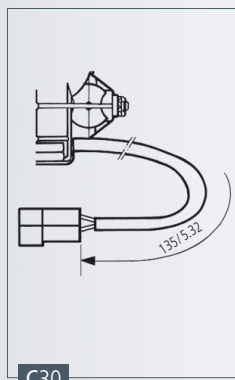


C30

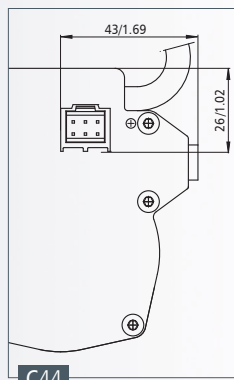


C44

PIN	FUNCTION - FUNCIÓN
1	-
2	OUT A
3	OUT B
4	-
5	GND
6	VCC




Connector MOLEX 90130-1206 and terminals 90119-2121
Counter connector (not included) MOLEX 90142-0006

SHAFT EJE ARBRE WELLE

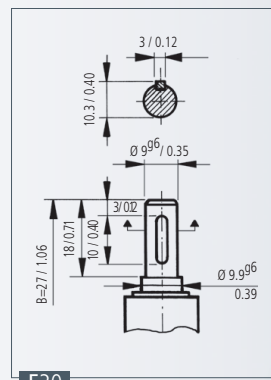


E30

WIRING DIAGRAM ESQUEMA ELÉCTRICO SCHEMA ÉLECTRIQUE SCHALTBIID

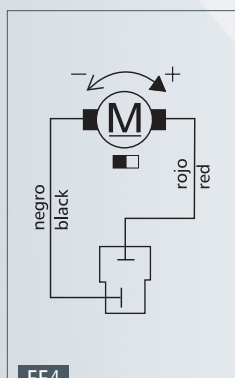

EE4


SENSOR HALL ESQUEMA SENSOR HALL
SCHEMA SENSOR HALL SCHALTBIID HALLSENSOR

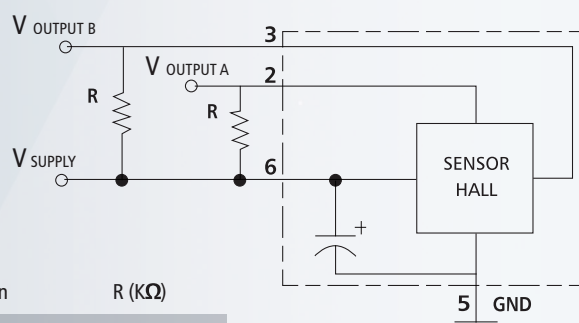

$V_{out} = V_{in}$ R (K Ω)

5V	0.5
12V	1.2
24V	2.4

CURVES CURVAS COURBES KURVEN

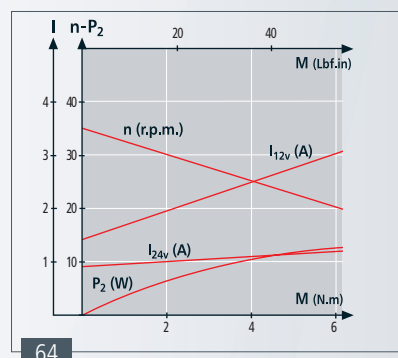

64

OUTPUT SIGNAL SEÑAL SALIDA
SIGNALISATION DE SORTIE AUSGANGSSIGNAL

