



319 hall

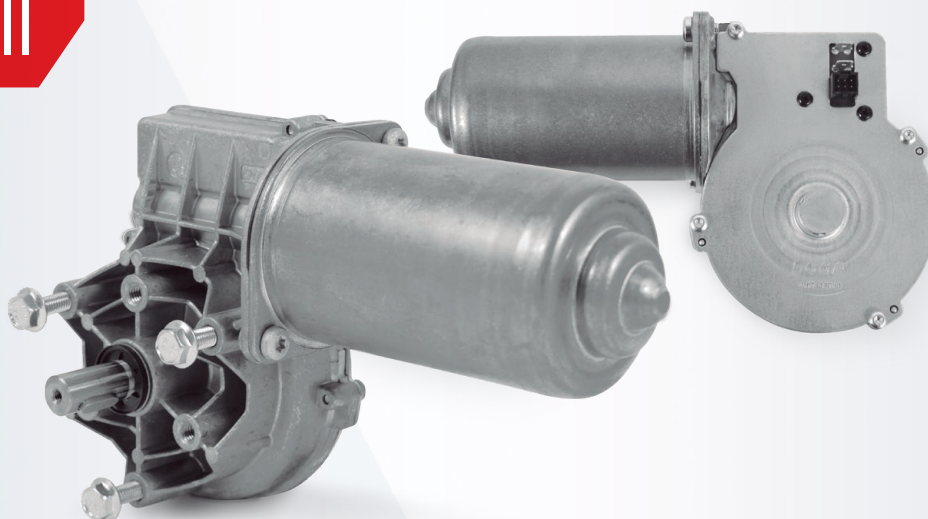

MOTOR FEATURES

REFERENCE NUMBER REFERENCIA REFERENZNUMMERN	NOMINAL VOLTAGE TENSION NOMINALE NENNSPANNUNG	NOMINAL TORQUE PAR NOMINAL COUPLE NOMINAL DREHMOMENT NOMINAL	NOMINAL SPEED VELOCIDAD NOMINAL VITESSE NOMINALE GESCHWINDIGKEIT NOMINAL	NOMINAL CURRENT CORRIENTE NOMINAL COURANT NOMINAL NOMINALSTROM	STARTING TORQUE PAR DE ARRANQUE COUPLE DE DEMARRAGE ANZUGSDREHMOMENT	STARTING CURRENT CORRIENTE DE ARRANQUE COURANT DE DEMARRAGE ANLAUFSTROM	SHAFT EJE ARBE WELLE	CONNECTIONS CONEXIONES CONNEXIONS ANSCHLÜSSART	WIRING DIAGRAM ESQUEMA ELECTRICO SCHEMA ELECTRIQUE SCHALTBIID	TRANSMISSION RATIO RELACION DE REDUCCION RAPPORT DE REDUCTEUR INTERSEZUNG	APPROXIMATE WEIGHT PESO APROXIMADO POIDS APPROXIMATIF GEWICHT (ca.)	WATERTIGHTNESS GRADO DE ESTANQUEIDAD ETANCHEITE FEUCHTIGKEITSSCHUTZKLASSE	WHEEL MATERIAL MATERIAL RUEDA MATERIAU ROUE MAT. DES SCHNICKENRADES	CURVE CURVA COURBE	PULSES NUM. Nº PULSOS NUM. PULSES IMPULSANZAHL
	Un (V)	Mn (N.m./lbf.in)	nn (r.p.m.)	In (A)	Ma (N.m./lbf.in)	Ia (A)				i	P (kg/lb)	IP			
31948462000	12	4 / 35	85	6	40 / 354	60	E35	C45	F6	78:2	1.7 / 3.75	IP40	PLA	62	468
31948463000	24	4 / 35	85	3	40 / 354	30	E35	C45	F6	78:2	1.7 / 3.75	IP40	PLA	62	468
31948602000	12	9 / 79.6	30	7	50 / 442	28	E35	C45	F6	81:1	1.7 / 3.75	IP40	PLA	58	972
31948603000	24	9 / 79.6	30	3	50 / 442	15	E35	C45	F6	81:1	1.7 / 3.75	IP40	PLA	58	972
31948622000	12	8 / 70.8	45	6	50 / 442	50	E35	C45	F6	81:1	1.7 / 3.75	IP40	PLA	60	972
31948623000	24	9 / 79.6	45	3	60 / 531	25	E35	C45	F6	81:1	1.7 / 3.75	IP40	PLA	61	972

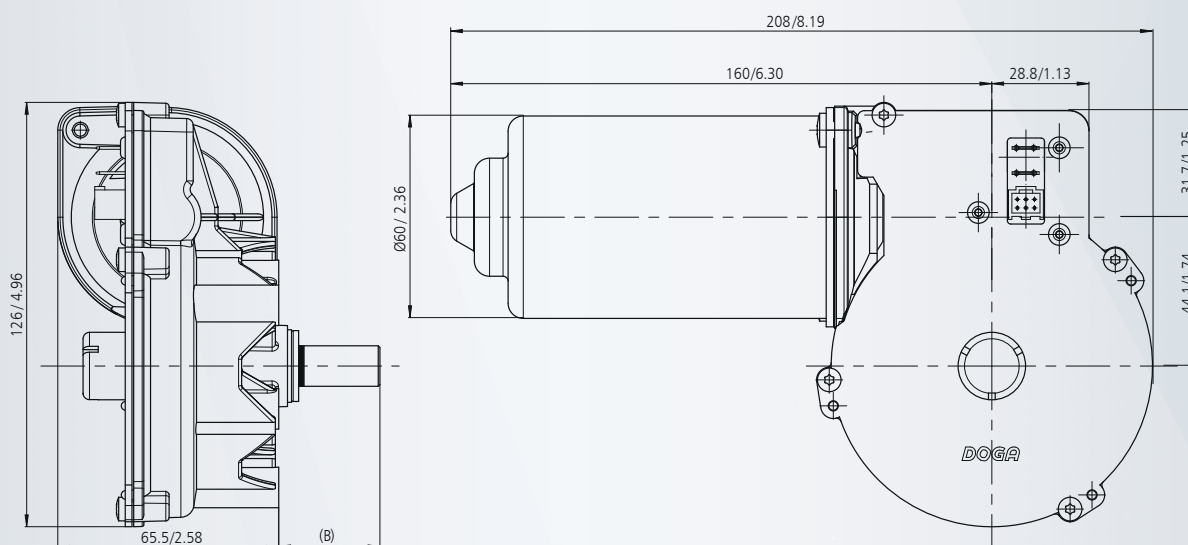

mm / inch

