




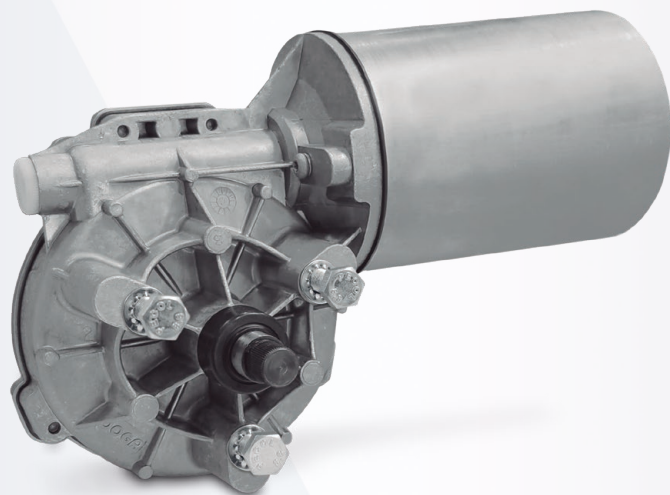

A





B




MOTOR FEATURES


REFERENCE NUMBER REFERENCIA REFERENZNUMMERN	NOMINAL VOLTAGE TENSION NOMINALE NENNSPANNUNG	NOMINAL TORQUE PAR NOMINAL DREHMOMENT NOMINAL	NOMINAL SPEED VELOCIDAD NOMINAL VITESSE NOMINALE GESCHWINDIGKEIT NOMINAL	NOMINAL CURRENT CORRIENTE NOMINAL COURANT NOMINAL NOMINALS FROM	STARTING TORQUE PAR DE ARRANQUE COUPLE DE DEMARRAGE ANZUGSDREHMOMENT	STARTING CURRENT CORRIENTE DE ARRANQUE COURANT DE DEMARRAGE ANLAUFSTROM	SHAFT EJE ARBRE WELLE	CONNECTIONS CONEXIONES CONNEXIONS ANSCHLUSST	WIRING DIAGRAM ESQUEMA ELECTICO SCHEMA ELECTRIQUE SCHALTBIID.	TRANSMISSION RATIO RELACION DE REDUCCION RAPPORT DE REDUCTEUR UNTERSEITZUNG	APPROXIMATE WEIGHT PESO APROXIMADO POIDS APPROXIMATIF GEWICHT (ca.)	WATERTIGHTNESS GRADO DE ESTANQUEIDAD ETANCHEITE FEUCHTIGKEITSSCHUTZKLASSE	WHEEL MATERIAL MATERIAL RUEDA MATERIAL ROUE MAT. DES SCHNECKENRADES	DESIGN: A.B DISEÑO: A.B DESSIN: A.B ABBILDUNG: A.B	CURVE CURVA COURBE KURVE
	Un (V)	Mn (N.m./lbf.in)	Pn (r.p.m.)	In (A)	Ma (N.m./lbf.in)	Ia (A)				i	P (kg/lb)	IP			
35938102000	12	20 / 177	22	13.8	130 / 1150	60	E37	C47	EE20	50:1	5.90 / 13	IP 66	PLA	A	20
35938103000	24	20 / 177	22	6	130 / 1150	30	E37	C47	EE20	50:1	5.90 / 13	IP 66	PLA	A	20
35992992000	12	15 / 132.7	40	18	120 / 1062	98	E37	C47	F20	50:1	5.90 / 13	IP 66	PLA	A	21
35992993000	24	15 / 132.7	40	9	120 / 1062	49	E37	C47	F20	50:1	5.90 / 13	IP 66	PLA	A	21
35990423000	24	25 / 221	25	7	135 / 1195	30	E37 / E51	C47	F20	50:1	5.90 / 13	IP 40	PLA	B	22

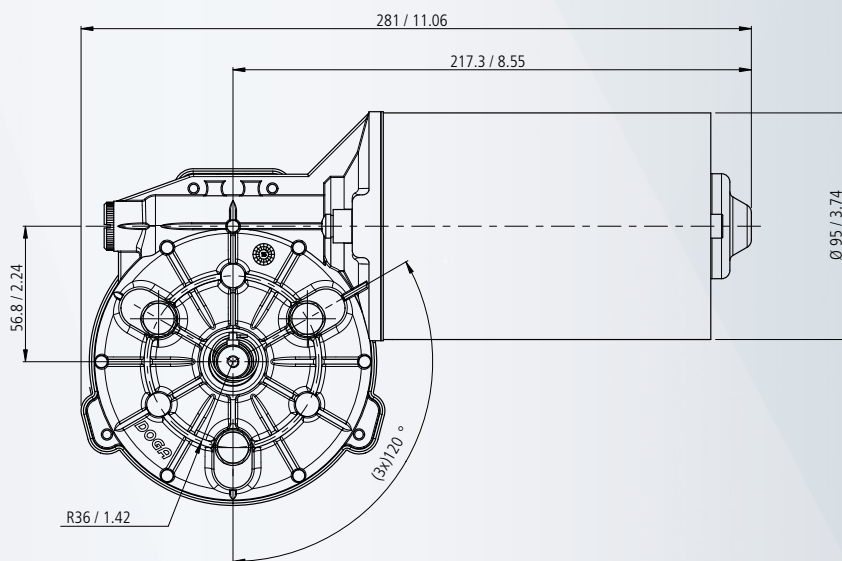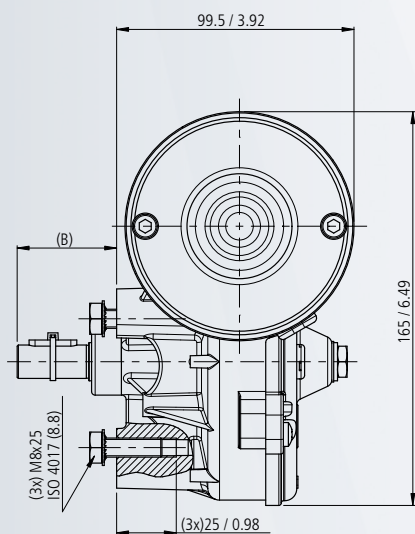

SHAFT EJE ARBRE WELLE




E37




E51

WIRING DIAGRAM ESQUEMA ELÉCTRICO SCHEMA ÉLECTRIQUE SCHALTBILD



EE20



F20


CONNECTIONS CONEXIONES CONNEXIONS ANSCHLUSSART




C47

mating conector (not supplied)
TE/DEUTSCH DT06-2S


CURVES CURVAS COURBES KURVEN

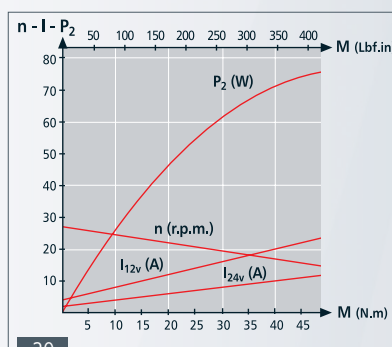

20

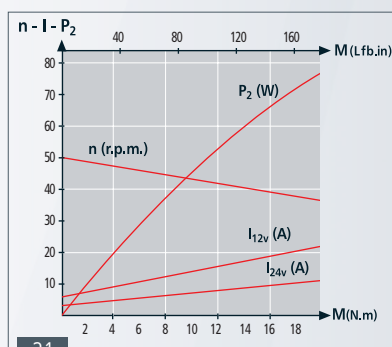

21

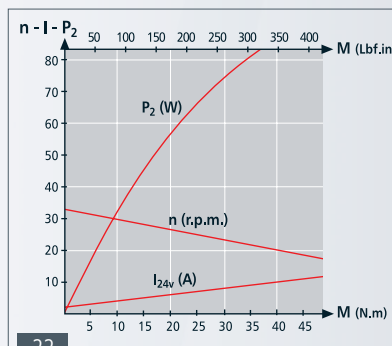

22